Wilmont Grinder Assembly Manual - Direct Mount Lamp

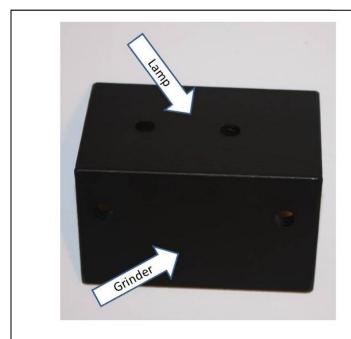


Photo 1 - Bracket for Lamp

of the Bolts then replace the Washers and Nuts. Tighten the Bolts & Nuts securely.

Step three: The Bracket should be connected to the Grinder. Thread the Lamp power cable along the Left side of the Grinder. Secure this cable to the Grinder using the enclosed Cable Clamp. The Clamp should be placed under the Nut & Washer. (see Photo 2).

In order to assemble your Wilmont Direct Mount Lamp you will need the following Tools:

- o 5/32 Allen Key
- o 7/16 wrench or socket (2)

Step one: Locate the holes on the Bracket that are closest together. Attach the Lamp using the bolts & nuts provided. (The screws are for mounting to a wall or table-top if you prefer). (See Photo 1).

Step two: Loosen the top 2 Bolts on the Grinder using both 7/16 wrenches, but remove only the Nuts and Washers. Slide the Bracket onto the ends



Photo 2 – Mounted Lamp & cable Clamp

Maintenance and Service Notes

- After the first 30 minutes of use check all fasteners for tightness.
- Operation speeds are determined by the motor which you provide. Follow all instructions provided.

Limited Warranty

Wilmont Grinders, LLC warrants this product for a period of 90 days to the original purchaser from the date of purchase. Wilmont Grinders, LLC warrants this product against defects in material and workmanship, and will at its option, repair or replace, free of charge, any part found to be defective in materials or workmanship. This limited warranty shall only apply if this product has been assembled, operated, and maintained in accordance with the Operator's manual furnished with the product, and has not been subject to misuse, abuse, commercial use, neglect, accident, improper maintenance, alteration, vandalism, theft, fire, water, or damage because of other peril or natural disaster. Please contact us at: www.wilmontgrinders.com for any issues regarding this product.